



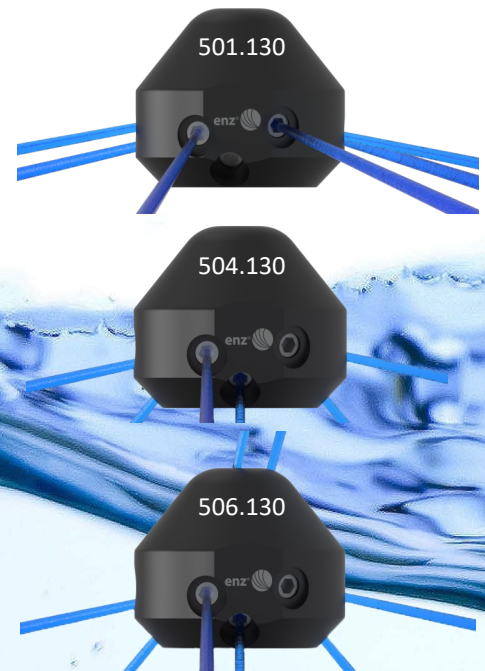

Bulldog 130HD

50x.130/50x.130N

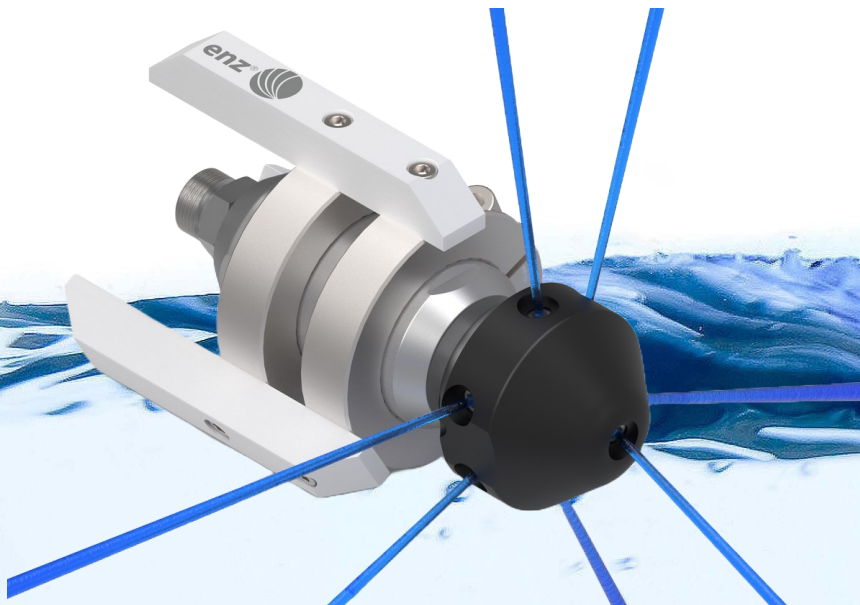

Advantages:

- **New:** High water jetting density due to sapphire inserts with flow straightener
- **New:** Easily changeable cleaning heads
- Tier 3 nozzle (excellent water chamber, nozzle inserts)
- Low maintenance due to magnetic brake (induction brake)
- No leakage

Area of application:

- For opening, polishing and general cleaning of pipes
- For removing even the most stubborn deposits
- Pipe diameters : 140 - 300mm / 2.6 - 5.9"



Specifications:

Product		 min				 max	ØxL
501.130	M24x1.5	40 l/min/10.6gpm		6		1000Bar/14,500psi	133x215mm/5.2 x 8.5"
501.130N	1/2" NPT	40 l/min/10.6gpm		6		1000Bar/14,500psi	133x215mm/5.2 x 8.5"
504.130	M24x1.5	46 l/min/12.2gpm	3	3		1000Bar/14,500psi	133x215mm/5.2 x 8.5"
504.130N	1/2" NPT	46 l/min/12.2gpm	3	3		1000Bar/14,500psi	133x215mm/5.2 x 8.5"
506.130	M24x1.5	50 l/min/13.2gpm	3	3	2	1000Bar/14,500psi	133x215mm/5.2 x 8.5"
506.130N	1/2" NPT	50 l/min/13.2gpm	3	3	2	1000Bar/14,500psi	133x215mm/5.2 x 8.5"

