


SPIRALPRESS ENO

(Cod. BS EN)




Tubo in speciale PVC-P appositamente studiato per il settore vinicolo, con spirale in PVC rigido antiurto e rinforzo tessile ad alta tenacità. Parete e spirale di grado alimentare. Grazie al rinforzo tessile presenta una buona resistenza a pressioni elevate; la spirale sporgente facilita le operazioni di scorrimento sul suolo. Idoneo al contatto alimenti secondo normativa UE 10/2011 (classi A,B,C, D1). Spirulina disponibile su richiesta su tutta la gamma diametri.

- Trasporto in aspirazione e mandata di bevande, vini e vinacce con concentrazione alcolica fino al 50%.

Transparent hose made by PVC-P, reinforced with a red anti-shock rigid PVC spiral and polyester reinforcement. Specially conceived for the wine industry and where a good resistance at high pressures is required, thanks to the textile reinforcement. The exposed PVC corrugated helix allows less resistance to dragging. Food grade hose wall and spiral. Food grade according to EU 10/2011 (classes A, B, C, D1).

- Suction and delivery of beverages and wines with alcoholic concentration up to 50%.


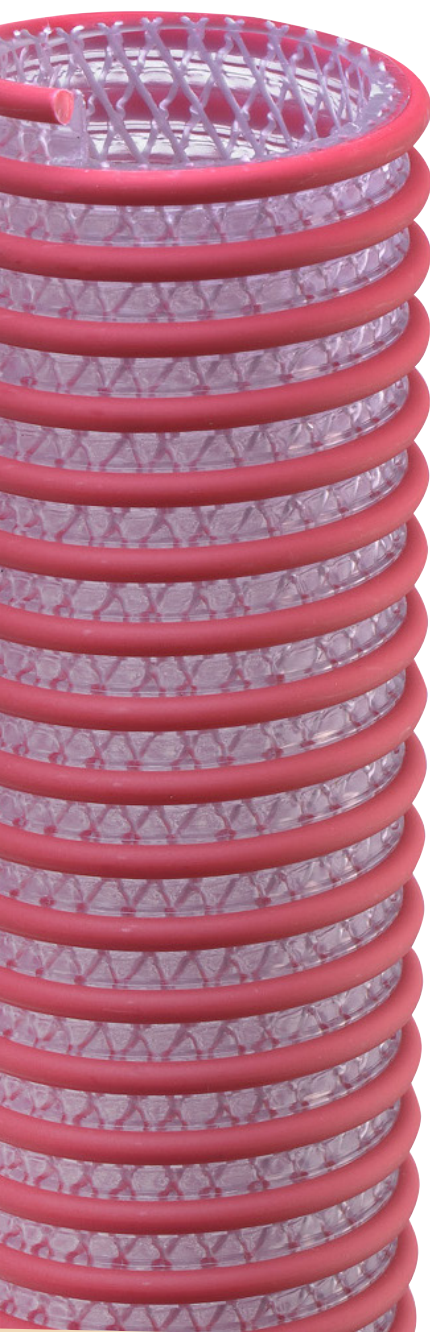


Tubo in PVC-P / Plasticized vinyl compound

Rinforzo tessile / Textile reinforcement

Tubo in PVC-P / Plasticized vinyl compound

Spirale in PVC rigido antiurto / Anti-shock rigid PVC spiral

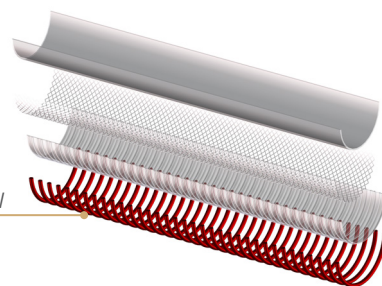

Spiralina disponibile (Cod. SC EN)
Banding coil available (Code SC EN)

Scheda tecnica / Technical data

Codice	Ø Int.	Ø Est.	Spess. Min.	Spess. Max.	Peso	P.E.	Depr.	R. Curvatura	Lg. Rotolo	Vol.	Lg. Spirulina
Code	Ø Int.	Ø Out.	Min wall th.	Max wall th.	Weight	W.P.	Vac.	Bending	Coil lgth.	Vol.	Banding lgth.
	mm	mm	mm	mm	g/m	[bar]	m H ₂ O	mm	m	m ³	mm
BSEN0380000000	38,1/1.1/2"	51,5	3,0	6,7	725	10	9,5	90	30	0,134	153
BSEN0400000000	40	53,4	3,0	6,7	745	8	9,5	100	30	0,139	152
BSEN0500000000	50	65,4	3,0	7,7	1085	7	9,5	160	30	0,251	180
BSEN0508000000	50,8/2"	66,2	3,0	7,7	1100	7	9,5	160	30	0,254	180
BSEN0600000000	60	76,8	3,0	8,4	1230	7	9,5	180	30	0,332	203
BSEN0760000000	76,2/3"	95,8	3,5	9,8	1900	6	9	200	30	0,414	225
BSEN0800000000	80	100,8	3,5	10,4	2180	6	9	210	30	0,581	225
BSEN1000000000	100	120,8	3,5	10,4	2580	6	9	300	30	0,928	240
BSEN1020000000	101,6	122,6	3,5	10,5	2655	6	9	300	30	0,942	240
BSEN1270000000	127/5"	152,0	5,0	12,5	3965	5	9	380	30	1,556	292,5
BSEN1520000000	152,4/6"	180,0	5,0	13,8	5225	5	8	450	20	1,440	322,5
BSEN2030000000	203,2/8"	236,0	6,0	16,4	8245	4	8	600	10	1,888	375

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / *Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity