

OSS IV



AGRICULTURE

Water
Suction applications



APPLICATIONS

For suction and discharge of domestic water, industrial water, effluents, slurry and liquid manure (with cuffed ends).

ADVANTAGES

- Wide range of diameters to suit pumps in all fields of industry (diameters up to 350mm can be supplied on request).
- Wide range of standard lengths available in most diameters.
- Excellent flexibility.

TECHNICAL DESCRIPTION

Inner tube: NR, black, smooth.

Reinforcement: synthetic textile with embedded steel helix.

Cover: NR, black, fabric impression, corrugated.

Temperature range: -30 °C to +60 °C.


COMPLEMENTARY INFORMATION

Other lengths and diameters up to 350mm available on request.

Packaged in straight lengths or coils, according to hose diameter.

No wrapping.

OD = Hose body.

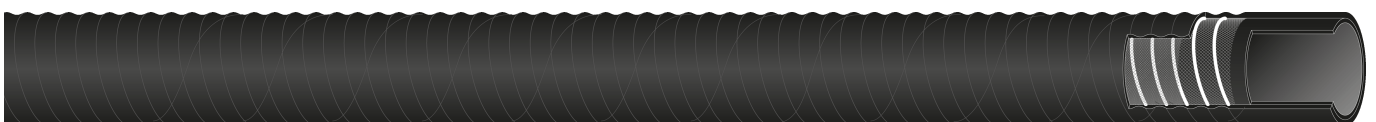

**AGRICULTURE****OSS IV**

ID mm	WALL THICKNESS mm	OD mm	WORKING PRESSURE bar	BURSTING PRESSURE bar	MAX. VACUUM bar	BENDING RADIUS mm	WEIGHT kg/m	LENGTH m	ARTICLE NUMBER	STOCK () or min. order m
25.0	6	37.0±1.5	5	15	0.8	75	0.7	2	0202586	40
25.0	6	37.0±1.5	5	15	0.8	75	0.7	3	0200284	39
25.0	6	37.0±1.5	5	15	0.8	75	0.7	4	0202587	40
25.0	6	37.0±1.5	5	15	0.8	75	0.7	5	0202588	40
25.0	6	37.0±1.5	5	15	0.8	75	0.7	6	0202589	36
30.0	6	42.0±1.5	5	15	0.8	90	0.82	2	0202590	40
30.0	6	42.0±1.5	5	15	0.8	90	0.82	3	0202591	40
30.0	6	42.0±1.5	5	15	0.8	90	0.82	4	0202592	40
30.0	6	42.0±1.5	5	15	0.8	90	0.82	5	0202593	40
30.0	6	42.0±1.5	5	15	0.8	90	0.82	10	0202595	40
35.0	6.5	48.0±1.5	5	15	0.8	105	1.01	2	0202596	40
35.0	6.5	48.0±1.5	5	15	0.8	105	1.01	4	0202597	40
35.0	6.5	48.0±1.5	5	15	0.8	105	1.01	5	0202598	40
35.0	6.5	48.0±1.5	5	15	0.8	105	1.01	6	0202599	40
40.0	6.5	53.0±1.5	5	15	0.8	120	1.14	2	0202600	40
40.0	6.5	53.0±1.5	5	15	0.8	120	1.14	3	0202601	40
40.0	6.5	53.0±1.5	5	15	0.8	120	1.14	4	0202602	40
40.0	6.5	53.0±1.5	5	15	0.8	120	1.14	5	0200286	40
40.0	6.5	53.0±1.5	5	15	0.8	120	1.14	6	0202603	40
40.0	6.5	53.0±1.5	5	15	0.8	120	1.14	10	0202604	40
45.0	6.5	58.0±1.5	5	15	0.8	135	1.42	2	0202605	40
45.0	6.5	58.0±1.5	5	15	0.8	135	1.42	3	0202606	40
45.0	6.5	58.0±1.5	5	15	0.8	135	1.42	4	0202607	40
45.0	6.5	58.0±1.5	5	15	0.8	135	1.42	5	0202608	40
45.0	6.5	58.0±1.5	5	15	0.8	135	1.42	6	0202609	40
50.0	6.5	63.0±1.5	5	15	0.8	150	1.55	2	0202610	40
50.0	6.5	63.0±1.5	5	15	0.8	150	1.55	3	0202611	40
50.0	6.5	63.0±1.5	5	15	0.8	150	1.55	4	0202612	40
50.0	6.5	63.0±1.5	5	15	0.8	150	1.55	5	0200287	40
50.0	6.5	63.0±1.5	5	15	0.8	150	1.55	6	0202613	40
50.0	6.5	63.0±1.5	5	15	0.8	150	1.55	10	0202614	20
55.0	6.5	68.0±1.5	5	12	0.8	220	1.69	2	0202615	40
55.0	6.5	68.0±1.5	5	12	0.8	220	1.69	4	0202617	40
55.0	6.5	68.0±1.5	5	12	0.8	220	1.69	5	0202618	40
55.0	6.5	68.0±1.5	5	12	0.8	220	1.69	6	0202619	40
60.0	6.5	73.0±1.5	4	12	0.8	240	1.83	2	0202620	40
60.0	6.5	73.0±1.5	4	12	0.8	240	1.83	3	0202621	18
60.0	6.5	73.0±1.5	4	12	0.8	240	1.83	4	0202622	40
60.0	6.5	73.0±1.5	4	12	0.8	240	1.83	5	0200288	40
60.0	6.5	73.0±1.5	4	12	0.8	240	1.83	6	0202623	40
60.0	6.5	73.0±1.5	4	12	0.8	240	1.83	10	0202624	20
60.0	6.5	73.0±1.5	4	12	0.8	240	1.83	20	5503117	20
65.0	6.5	78.0±1.5	4	12	0.8	260	1.97	2	0202625	40
65.0	6.5	78.0±1.5	4	12	0.8	260	1.97	3	0202626	40
65.0	6.5	78.0±1.5	4	12	0.8	260	1.97	4	0202627	40
65.0	6.5	78.0±1.5	4	12	0.8	260	1.97	5	0202628	40
65.0	6.5	78.0±1.5	4	12	0.8	260	1.97	6	0202629	40
70.0	6.5	83.0±1.5	4	12	0.8	280	2.11	2	0202630	40
70.0	6.5	83.0±1.5	4	12	0.8	280	2.11	3	0202631	40
70.0	6.5	83.0±1.5	4	12	0.8	280	2.11	4	0202632	40
70.0	6.5	83.0±1.5	4	12	0.8	280	2.11	5	0200289	40
70.0	6.5	83.0±1.5	4	12	0.8	280	2.11	10	0202634	40
75.0	6.5	88.0±1.5	4	12	0.8	300	2.24	2	0202635	40
75.0	6.5	88.0±1.5	4	12	0.8	300	2.24	3	0202636	40
75.0	6.5	88.0±1.5	4	12	0.8	300	2.24	4	0202637	40
75.0	6.5	88.0±1.5	4	12	0.8	300	2.24	5	0200290	40
75.0	6.5	88.0±1.5	4	12	0.8	300	2.24	6	0202638	40
80.0	7	94.0±1.5	4	12	0.8	320	2.62	2	0202639	40
80.0	7	94.0±1.5	4	12	0.8	320	2.62	4	0202641	40
80.0	7	94.0±1.5	4	12	0.8	320	2.62	5	0200291	40
80.0	7	94.0±1.5	4	12	0.8	320	2.62	10	0202643	20
90.0	7	104.0±1.5	4	12	0.8	360	2.92	2	0202644	40
90.0	7	104.0±1.5	4	12	0.8	360	2.92	3	0202645	40
90.0	7	104.0±1.5	4	12	0.8	360	2.92	4	0202646	40
90.0	7	104.0±1.5	4	12	0.8	360	2.92	6	0202647	40
90.0	7	104.0±1.5	4	12	0.8	360	2.92	10	0202648	20
100.0	7	114.0±1.5	4	12	0.8	400	3.45	2	0202649	40
100.0	7	114.0±1.5	4	12	0.8	400	3.45	3	0200293	40
100.0	7	114.0±1.5	4	12	0.8	400	3.45	4	0202650	40
100.0	7	114.0±1.5	4	12	0.8	400	3.45	5	0200294	40
100.0	7	114.0±1.5	4	12	0.8	400	3.45	6	0202651	40
100.0	7	114.0±1.5	4	12	0.8	400	3.45	10	0202652	20
110.0	8	126.0±2.0	3	9	0.5	550	4.22	3	0200295	40
110.0	8	126.0±2.0	3	9	0.5	550	4.22	4	0202654	40
110.0	8	126.0±2.0	3	9	0.5	550	4.22	5	0200296	40
120.0	9	138.0±2.0	3	9	0.5	550	5.17	2	0202655	40
120.0	9	138.0±2.0	3	9	0.5	550	5.17	5	0200298	40
125.0	10	145.0±2.0	3	9	0.5	550	5.37	3	0202658	40
125.0	10	145.0±2.0	3	9	0.5	550	5.37	4	0202659	40
125.0	10	145.0±2.0	3	9	0.5	550	5.37	5	0202660	40
150.0	10	170.0±2.0	3	9	0.5	550	7.19	3	0200299	40
150.0	10	170.0±2.0	3	9	0.5	900	7.19	4	0202662	40
150.0	10	170.0±2.0	3	9	0.5	900	7.19	5	0200300	40
200.0	10	220.0±2.0	3	9	0.5	2000	16.17	4	0202474	40
200.0	10	220.0±2.0	3	9	0.5	2000	16.17	5	0202475	40

**TRELLEBORG**WWW.TRELLEBORG.COM/FLUIDHANDLING

Tolerance on length: ±1% (ISO 1307 Standard).



Digital version