


QUICK LOCK

Technical data sheet

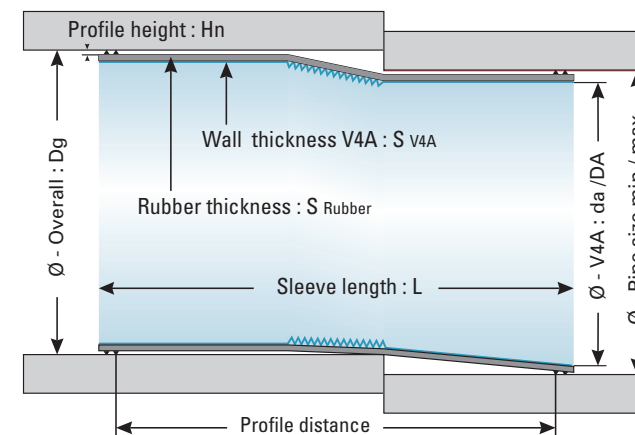

QUICK-LOCK Flex DN 200 - DN 600

QL sleeve DN		Rubber jacket DN	Sleeve length	Total diameter rolled	Suitable for pipes from / to		max. radial offset size	Packer	Wheelbase	Stainless steel sleeve			Rubber jacket		
					Pipe ID min.	Pipe ID max.				Wall thickness	V4A pipe rolled	Max. expanded diameter	Rubber thickness	Height of seals	Rubber thickness incl. Height of seals
mm	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
DN	DN	Desig.	L	Dg	DN min	DN max	bis zu	VP	RS	S V4A	da	DA	S Rubber	Hn	
200	8"	200	360	173	196	207	20	VP 150-200 VFWL		1.2	159	202	2	5	7
250	10"	250	360	215	247	261	20	VP 200-300 VFWL		1.2	199	252	2	6	8
300	12"	300	360	256	293	313	25	VP 200-300 VFWL		1.2	238	305	2	7	9
400	16"	400	360	350	390	415	25	VP 350-500 VFWL		1.5	330	406	2	8	10
450	18"	450	360	387	410	465	25	VP 350-500 VFWL		2.0	367	455	2	8	10
500	20"	500	460	448	487	515	25	VP 350-500 VFWL / VP 500-600 VFWL		2.0	428	505	2	8	10
600	24"	600	460	539	582	617	25	VP 500-600 VFWL / VP 600-700	--- /RS 600	2.0	519	607	2.5	8	10.5