


QUICK LOCK

Technical data sheet

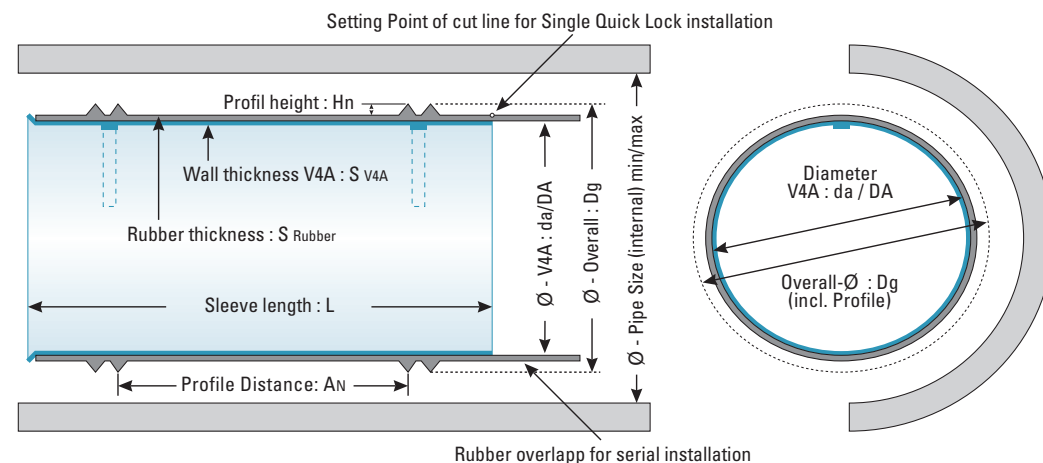

QUICK-LOCK mini DN 100 - DN 150

Quick-Lock Mini		Sleeve length	Total diameter rolled	Suitable for pipes from / to		Packer	Stainless steel sleeve			EPDM Rubber		
				Pipe ID min.	Pipe ID max.		Wall thickness	V4A pipe rolled	Max. expanded diameter	EPDM Rubber	Rubber thickness	Height of Seals
mm	inch	mm	mm	mm	mm	VP	mm	mm	mm	mm	mm	mm
DN		L	Dg	DN min	DN max		S V4A	da	DA	DN	S Rubber	Hn
0100-090 ¹	4"	90	90	97	107	VP 100-150 VFW	0.6	81	102	100-140 ³	1.5	3.0
0100-140 ²	4"	140	90	97	107	VP 100-150 VFW	0.6	81	102	100-140	1.5	3.0
0125-090 ¹	5"	90	109	122	132	VP 100-150 VFW	0.6	100	127	125-140 ³	1.5	3.0
0125-140 ²	5"	140	109	122	132	VP 100-150 VFW	0.6	100	127	125-140	1.5	3.0
0150-090 ¹	6"	90	128	133	154	VP 100-150 VFW	0.8	118	145	150-140 ³	2.0	3.0
0150-140 ²	6"	140	128	133	154	VP 100-150 VFW	0.8	118	145	150-140	2.0	3.0

¹ Sleeve can be used in bended pipes (bends up to 45°)

² Sleeve can only be used in straight pipes

³ EPDM rubber must be shortened