


QUICK LOCK

Technical data sheet

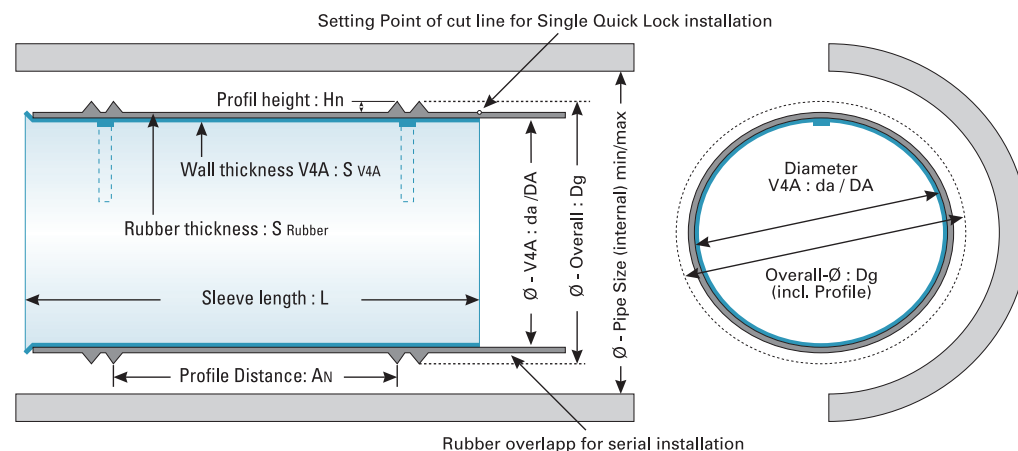


QUICK-LOCK DN 150 - DN 800

Quick-Lock sleeve DN		Rubber jacket DN	Sleeve length	Total diameter rolled	Suitable for pipes from / to		Sealed area Single installation	Packer	Stainless steel sleeve			Rubber jacket		
					Pipe ID min.	Pipe ID max.			Wall thickness	V4A pipe rolled	Max. expanded diameter	Rubber thickness	Height of seals	Rubber thickness incl. seals
mm	inch	mm	mm	mm	mm	mm	mm	VP	mm	mm	mm	mm	mm	mm
DN:			L	Dg	DN min	DN max	AE		S V4A	da	DA	Rubber	Hn	G
150	6"	150	400	131	147	155	320	VP 150-200 VFWL	1.0	119	149	2.0	4.0	6.0
158	6"	150	400	143	156	165	320	VP 150-200 VFWL	1.0	131	158	2.0	4.0	6.0
176	7"	176	400	156	171	182	315	VP 150-200 VFWL	1.2	144	177	2.0	4.0	6.0
188	7"	188	400	164	185	196	322	VP 150-200 VFWL / VP 200-300 VFWL	1.2	150	189	2.0	5.0	7.0
200	8"	200	400	173	196	207	320	VP 150-200 VFWL/ VP 200-300 VFWL	1.2	159	202	2.0	5.0	7.0
210	8"	200	400	187	207	219	320	VP 150-200 VFWL/ VP 200-300 VFWL	1.2	173	212	2.0	5.0	7.0
225	9"	225	400	200	221	233	315	VP 200-300 VFWL	1.2	186	227	2.0	5.0	7.0
240	9"	250	400	212	237	249	315	VP 200-300 VFWL	1.2	198	242	2.0	5.0	7.0
250	10"	250	400	215	247	261	315	VP 200-300 VFWL	1.2	199	252	2.0	6.0	8.0
276	11"	276	400	240	271	285	315	VP 200-300 VFWL	1.2	224	278	2.0	6.0	8.0
286	11"	276	400	250	280	294	315	VP 200-300 VFWL	1.2	232	287	2.0	7.0	9.0
300	12"	300	400	256	293	313	310	VP 200-300 VFWL	1.2	238	305	2.0	7.0	9.0
315	12"	300	400	277	308	324	310	VP 200-300 VFWL	1.5	259	315	2.0	7.0	9.0
330	13"	300	400	289	320	341	310	VP 200-300 VFWL	1.5	271	335	2.0	2.0	9.0

QUICK LOCK

Technical data sheet

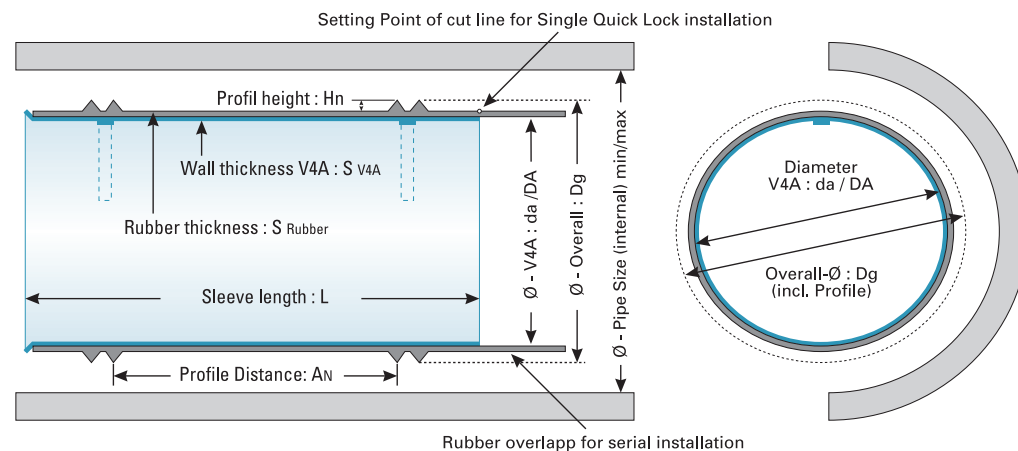

QUICK-LOCK DN 150 - DN 800

Quick-Lock sleeve DN		Rubber jacket DN	Sleeve length	Total diameter rolled	Suitable for pipes from / to		Sealed area Single installation	Packer	Wheelbase	Stainless steel sleeve			Rubber jacket		
					Pipe ID min.	Pipe ID max.				Wall thickness	V4A pipe rolled	Max. expanded diameter	Rubber thickness	Height of seals	Rubber thickness incl. seals
mm	inch	mm	mm	mm	mm	mm	mm	VP	RS / SPV	mm	mm	mm	mm	mm	mm
DN	DN		L	Dg	DN min	DN max	AE			S V4A	da	DA	Rubber	Hn	G
350	14"	350	400	312	341	363	325	VP 350-500 VFWL		1.5	294	355	2	7.0	9.0
380	15"	350	400	322	367	386	325	VP 350-500 VFWL		1.5	304	377	2	7.0	9.0
400	16"	400	400	350	390	415	310	VP 350-500 VFWL		1.5	330	406	2	8.0	10.0
450	18"	450	500	378	438	464	395	VP 350-500 VFWL		2.0	367	455	2	8.0	10.0
480	19"	450	500	412	467	490	395	VP 350-500 VFWL		2.0	392	480	2	8.0	10.0
500	20"	500	500	450	487	515	385	VP 350-500 VFWL / VP 500-600 VFWL		2.0	428	505	2	9.0	11.0
524	21"	500	500	452	497	534	385	VP 500-600 VFWL		2.0	430	524	2	9.0	11.0
560	22"	500	500	477	540	568	385	VP 500-600 VFWL		2.0	455	560	2	9.0	11.0
600	24"	600	500	540	582	617	390	VP 500-600 VFWL / VP 600-700	--- /RS 600	2.0	519	607	2.5	8.0	10.5
600 NL	24"	600	500	511	575	618	390	VP 500-600 VFWL / VP 600-700	--- /RS 600	2.0	490	610	2.5	8.0	10.5
650	26"	600	500	589	632	667	390	VP 600-700	RS 600+SPV 650	2.0	568	658	2.5	8.0	10.5
675	27"	700	485	615	666	685	375	VP 600-700	RS 600+SPV 675	2.0	592	680	2.5	9.0	11.5
700	28"	700	485	598	677	727	375	VP 600-700/VP 700-800	RS 600+SPV 700/RS 700	2.0	575	713	2.5	9.0	11.5
750 ¹	30"	700	485	618	720	762	375	VP 700-800	RS 750	2.0	595	750	2.5	9.0	11.5
800 ENG ^{1'2}	32"	800	485	633	780	827	375	VP 700-800	RS 700+SPV 800	2.0	610 ²	815	2.5	9.0	11.5

¹ not part of the national technical approval. ² Installation of Quick-Lock DN 800 needs a min. manhole entry of 625 mm!